

# HK610

QUICK START GUIDE



**HAWK**  
**GAMING**



FN+DELETE=Light effect on/off

FN+HOME=Lighting mode switching (18 kinds)

FN+PGUP=light effect monochrome mode

FN+PGDN=Light effect direction switch (individual mode)

FN+U/I/O/P=Lighting custom recording

FN + up and down arrow keys = five levels of brightness adjustment

FN + left and right arrow keys = five levels of speed adjustment

FN+ESC=Restore factory settings

FN+|=Light recording

FN+E/R/T=Bluetooth pairing and device switching

FN+Q =2.4G pairing

FN+F1= screen brightness decrease

FN+F2 = screen brightness plus

FN+F3=active window

FN+F4=Explorer

FN+F5=Desktop display

FN+F6=Volume down

FN+F7=Volume Plus

FN+F8=Mute

FN+F9=Play/Pause

FN+F10=stop

FN+F11=Previous song

FN+F12=Next song

**FN+WIN locked (screen shows WIN icon lit),  
unlocked (screen shows WIN icon off) Note: MAC  
system does not support**

English

Size: 335×146.4×44.4mm

Weight: 1172±20g

Life: 50,000,000times (times)

Quantity: 82 keys

## **SYSTEM REQUIREMENTS:**

Windows XP/WIN7/WIN8/ WIN10/VISTA  
IBM or compatible computer

---

## **CUSTOM LIGHT RECORDING**

Any mode, first press FN + U / I / O / P to select, and then press FN + \| for custom lighting color recording, at this time \| key instructions LED white light blinking, press any key, you can choose 8 colors and no light cycle switch until your favorite color, and finally press FN + \| save, recording success.

## USB WIRED MODE

Working voltage: DC5V±5%

Working current: 300MA

Wired mode switching: Three switch to the OFF position, the screen shows the USB status, switch successfully

Note: The factory mode is wired

## BLUETOOTH/2.4G MODE

Working voltage: DC3.7V±5%

Working current: white light is always on, the maximum is 492 MA, the default light is 294 MA, and the light is off 42 MA

Lithium battery capacity: 4000MAh 14.8WH

Wireless mode usage time:

White light is always on, continuous use for about 8 hours, and interval use for about 16 hours

Default light, about 13 hours of continuous use, about 26 hours of interval use

Turn off the light, about 95 hours of continuous use, about 190 hours of intermittent use

The above data is an engineering test mode, and there is a slight deviation according to the actual use situation

## BLUETOOTH PAIRING

Long press: the blue light under the E/R/T key flashes quickly to match the code, search for Bluetooth devices(HM610 BT3.0/5.0) , after the pairing is successful, the blue light will turn off and return to the current light effect; the keyboard fails to match for 1 minutes Then automatically turn off the lights to sleep, you need any key to wake up and re-pair.

Short press: switch to Bluetooth E/R/T device, or leave Bluetooth E/R/T device

Note: When the E/R/T device flashes slowly for a long time, you need to press FN+E/R/T for a long time to match the code. If the device shows that the Bluetooth pairing is successful, but cannot be used, please delete the(HM610 BT3.0/5.0) Bluetooth device name in the Bluetooth list of the device, and pair it again.


## 2.4G PAIRING

FN+Q

Long press: the green light flashes quickly under the Q key to pair the code, and then insert the receiver. After the pairing is successful, the green light will turn off and return to the current light.

## ADAPTER INSTRUCTIONS FOR USE

When players are in competitive games, they need to insert the 2.4G receiver into the dedicated signal adapter, and then connect to the computer through a data cable USB port, the mouse is controlled by 10CM close to the adapter to avoid delay



## WIN/MAC SYSTEM SWITCHING (FACTORY DEFAULT WIN SYSTEM)

Win/Mac system switch

Factory default win system, the corresponding multimedia key is only applicable to Win/Android system

Press FN+right Ctrl key for 3 seconds, then the screen display system switch icon will light up, the corresponding multimedia key is only applicable to Mac/ios system.

Press FN+right Ctrl key again 3 seconds later, the screen display system switch icon back to the default win system

## WIRELESS SLEEP

Bluetooth/2.4G connected to the device, 2 minutes without operation, automatically turn off the backlight, 30 minutes without operation into hibernation, click any key to wake up the original state.


## LOW BATTERY INDICATION

When the display battery icon appears red tips, for low power tips, need to charge to ensure the normal use of the keyboard (according to the actual use of slight deviation)

## CHARGING INDICATION

When the data cable is connected to the keyboard, the display battery icon starts working, indicating that it is charging and stops when it is full. (Charging current is recommended 500-1000MA)

## COLOR SCREEN DISPLAY FUNCTION DESCRIPTION

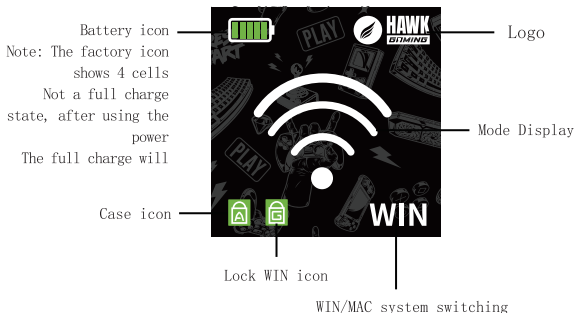

The driver can set GIF motion pictures and still pictures:

Way a setting: static pictures can be set up to 5 at a time

Way two settings: only one GIF motion picture, 5 static pictures



**HAWK**  
**GAMING**